



CastWorks™ access panel with AcoustiBuilt® Seamless Acoustical Ceiling System

CastWorks™ GFRG (glass fiber reinforced gypsum) access panels provide concealed access within ceilings or walls.

KEY SELECTION ATTRIBUTES

- Easy access to plenum, mechanical, wiring or plumbing
- Available in square or rounded corner designs
- Can be customized for other shapes and sizes
- Blends with drywall and can be field painted or textured with a desired finish
- Choose from lay-in or hinged
- Quick to install
- Locking, hinged panels available for use with key or screwdriver
- Access panels can be integrated into the AcoustiBuilt® Seamless Ceiling and Wall System


COLOR

Paint Grade
(Unfinished for field painting)




White

ACCESS PANEL TYPE: LAY-IN OR HINGED





Squared Corners Lay-in




Rounded Corners Hinged
(Note: Add "H" to item number to specify a hinged panel.)

VISUAL SELECTION


Product Name	Item No.*	Door Size (Inches)	Frame Size (Inches)
Access Panel – Squared Corners Lay-in 5/8" thick 	APS0909_	9" x 9"	15" x 15"
	APS1212_	12" x 12"	18" x 18"
	APS1616_	16" x 16"	22" x 22"
	APS1818_	18" x 18"	24" x 24"
	APS2424_	24" x 24"	30" x 30"
	APS2230_ †	22" x 30"	24" x 36"
	APS3030_ †	30" x 30"	36" x 36"
Access Panels for AcoustiBuilt® Squared Corners Lay-in 7/8" thick	APS1212A_	12" x 12"	18" x 18"
	APS1818A_	18" x 18"	24" x 24"
	APS2424A_	24" x 24"	30" x 30"
Access Panel – Rounded Corners Lay-in 5/8" thick 	APRO909_	9" x 9"	15" x 15"
	APR1212_	12" x 12"	18" x 18"
	APR1616_	16" x 16"	22" x 22"
	APR1818_	18" x 18"	24" x 24"
	APR2424_	24" x 24"	30" x 30"
	APR2230_ †	22" x 30"	24" x 36"
	APR3030_ †	30" x 30"	36" x 36"
Access Panels for AcoustiBuilt Rounded Corners Lay-in 7/8" thick	APR1212A_	12" x 12"	18" x 18"
	APR1818A_	18" x 18"	24" x 24"
	APR2424A_	24" x 24"	30" x 30"
Other Size Panels 1/2", 5/8", or 7/8" thickness		W 4" – 144" L: 4" – 144"	Varies

* To specify a hinged door, add "H" to item number (e.g., APS0909 H)
† Available with or without gasket.

ACOUSTIBUILT® CEILING AND WALL PANELS

	Item No.	Dimensions (Inches)
7/8" Tapered Edge on 4 Sides 	2604	48 x 72 x 7/8"

NOTE: When installing with AcoustiBuilt panels, select a CastWorks panel for AcoustiBuilt (e.g., APR1212A).

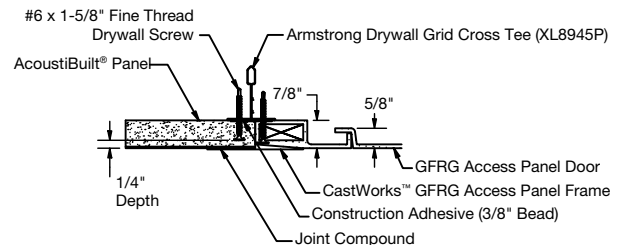

PHYSICAL DATA

Material
Glass Fiber Reinforced Gypsum (GFRG/GRC) is a composite consisting of gypsum cement and water, reinforced with glass fibers.

Surface Finish
Standard unfinished, paint grade. Can be coated to achieve any desired color.

Fire Performance
Flame Spread Index 0. Smoke Developed Index 5 or less.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017

Installation Considerations
Install CastWorks™ parts as indicated on approved shop drawings, other recommendations, and the contract requirements. Comply with ASTM Standard C1467 for installation. Use caution and wear appropriate hand, eye, and dust mask protection when handling CastWorks materials. Refer to AcoustiBuilt installation instructions for complete details.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Warranty
One (1) Year Limited Warranty. Details at armstrongceilings.com

Weight
4 – 20 lbs per panel (depending on thickness and design)